




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>H04Q 7/38</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/13447</b> <b>(43) International Publication Date:</b> 9 March 2000 (09.03.00)
<b>(21) International Application Number:</b> PCT/EP99/05824 <b>(22) International Filing Date:</b> 10 August 1999 (10.08.99) <b>(30) Priority Data:</b> 9818579.6      27 August 1998 (27.08.98)      GB <b>(71) Applicant (for all designated States except US):</b> MOTOROLA LIMITED [GB/GB]; Viabes Industrial Estate, Basingstoke, Hampshire RG22 4PD (GB). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> WATSON, Andrew [GB/GB]; 51 Bryher Island, Port Solent, Cosham, Portsmouth, Hampshire PO6 4UF (GB). DELLAVERSON, Lou [US/US]; 11 Ferndale Road, Barrington, IL 60010 (US). WRAY, Antony [GB/GB]; 94 Cowslip Bank, Lychpit, Basingstoke, Hampshire RG24 8RR (GB). <b>(74) Agents:</b> IBBOTSON, Harry et al.; Motorola European Intellectual Property Operations, Midpoint, Alencon Link, Basingstoke, Hampshire RG21 7PL (GB).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>

(54) Title: BANDWIDTH PROVISION IN A COMMUNICATION SYSTEM

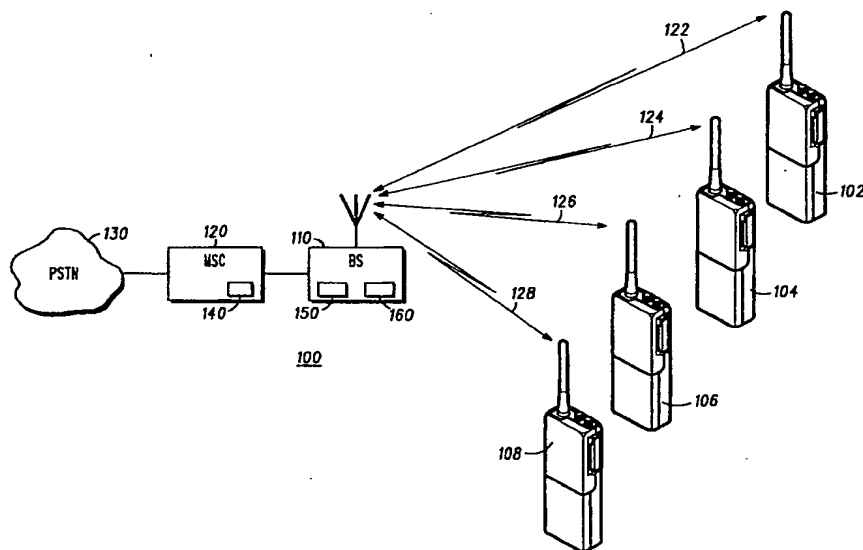

## (57) Abstract

A method of operating within a communication system wherein a bandwidth provider responsible for a given bandwidth provides different amounts of bandwidth to respective partial users. The method comprises the steps of determining a bandwidth availability profile; determining a traffic profile; and transmitting capacity information to a partial user, wherein the capacity information comprises the bandwidth availability profile and the traffic profile. Also described is corresponding apparatus for a communication system. The invention is particularly advantageous in network arrangements including cellular radio communication systems, such as UMTS.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

BANDWIDTH PROVISION IN A COMMUNICATION SYSTEMField of the Invention

5 The present invention relates to a method of operating within a communication system wherein a bandwidth provider responsible for a given bandwidth of said communication system provides different amounts of said given bandwidth to respective partial users of said given bandwidth. The present invention also relates to an apparatus for such a communication system. The invention is applicable to but not limited to a cellular radio communication system such as the Universal Mobile Telecommunication System (UMTS) currently under standardisation.

Background of the Invention

15

Communication systems comprise a finite amount of bandwidth resource based upon the technical means forming the communications links and interfaces between different parts of the communication system. Also, a bandwidth resource can be limited for commercial rather than technical reasons. In the present application bandwidth is to be understood in the sense of bandwidth capacity with respect to communications signalling and traffic. Accordingly, bandwidth can include or be expressed as number of channels.

In communications systems, there is a hierarchy with respect to provision of the bandwidth resource. The simplest example would be a system, for example a private landline telephone system, in which a single operator controlled all the components including communication links of the communications system. In this system, the operator represents the sole bandwidth provider. He provides bandwidth to each subscriber making a telephone call, thus such subscribers represent partial users of the total bandwidth of the system. In this case the amount of bandwidth provided for each partial user is the same.

A more complicated bandwidth provision hierarchy is one in which total system bandwidth is divided commercially between a first level of partial users thereof represented by different operators who in turn supply respective parts of their bandwidth down a bandwidth hierarchy chain to a second layer of partial users thereof, and so on, until ultimately reaching the final layer of partial users represented by the end-users or subscribers. Both conventional landline telephone systems, and cellular radio communication systems currently exist which are arranged in this manner for commercial reasons. Also, such sub-division of bandwidth takes place in other communication networks connected on a nodal fashion and containing sub-links, such as the internet.

Harmonised interface standards facilitate commercial sub-division of fundamental bandwidth resource within a given communication system. An established harmonised system applicable to cellular radio communication systems is Global System for Mobile Communications (GSM). Statistical multiplexing is employed in GSM systems to enhance spectrum efficiency. Due to the statistical nature of traffic low efficiency can arise, for example a single GSM carrier of seven time division multiple access (TDMA) channels is typically only 42% efficient (2.94 Erlangs at 2% blocking).

The Universal Mobile Telecommunication System (UMTS) currently under standardisation is intended to provide a harmonised standard under which cellular radio communication systems will provide communications links suitable for transmitting a wide variety of data services. Higher bandwidth needs such as those required by multimedia applications will be encompassed. It is expected that within the framework of developments such as UMTS or the like, cellular radio communication systems will play an increasing role in information communication arrangements including those such as the internet.

Generally speaking, the application of bandwidth provision hierarchies within communication systems such as cellular radio communications systems along

the lines of UMTS creates a broad range of new engineering problems and challenges. Indeed, one of the challenges faced is to envisage what new opportunities arise to provide bandwidth providers and partial users of bandwidth with additional facilities in the light of such application.

5

### Summary of the Invention

In the light of the above the present inventors have envisaged that systems  
10 such as UMTS can be arranged to provide bandwidth from a bandwidth provider to partial users thereof in a variable bandwidth and bandwidth-on-demand mode. The present inventors have envisaged that in systems such as UMTS, such modes will particularly require that the amount of bandwidth provided to a partial user for a particular item of traffic can advantageously be chosen by  
15 either the provider or partial user such that spectral efficiency and network capacity are met in a balanced fashion. If the amount of bandwidth provided is insufficient the needs for that traffic will not be met. On the other hand, if surplus bandwidth is needlessly provided then this will waste bandwidth resource hence ultimately rendering the system inefficient.

20

The present inventors have envisaged that contrary to conventional systems in which the amount of bandwidth provided for each partial user is the same, in systems such as UMTS different partial users and also different services required by a particular partial users will economically require a different amount  
25 of bandwidth.

Furthermore, the present inventors have envisaged that different partial users, and also different services, also have different requirements with respect to quality, e.g. inverse of error rate, and delay, i.e. latency, where delay is the  
30 period of time that elapses before the or while a service is transmitted. For example, two way speech telephony has a modest requirement for quality but a

strong requirement for good performance with respect to delay, good performance being a short delay. Text messages benefit trunking and spectrum efficiency by being sent at high bandwidth, although a long delay is acceptable.

- 5 The present invention advantageously implements means for the bandwidth provider and partial user to take advantage of the characteristics described above and envisaged by the present inventors. More particularly, the present invention will allow for greater utilisation of available capacity, by for example allowing high latency data to be sent in gaps in speech traffic, in an improved  
10 fashion based upon new technical possibilities derived by the present inventors with respect to systems such as UMTS.

- According to one aspect of the present invention, there is provided a method of operating within a communication system wherein a bandwidth provider  
15 responsible for a given bandwidth of said communication system provides different amounts of said given bandwidth to respective partial users of said given bandwidth, as claimed in claim 1.

- According to another aspect of the invention, there is provided an apparatus  
20 for a communication system wherein a bandwidth provider responsible for a given bandwidth of said communication system provides different amounts of said given bandwidth to respective partial users of said given bandwidth, as claimed in claim 6.

- 25 Further aspects of the invention are as claimed in the dependent claims.

- The present invention provides the partial user with capacity information, which enables the partial user to advantageously make an informed and efficient use of bandwidth facility. Additional specific advantages are apparent from the  
30 following description and figures.

### Brief Description of the Drawings

FIG. 1 is an illustration of a communication system in accordance with the present invention.

5

### Description of a Preferred Embodiment of the Invention

One particular embodiment of the invention is now described by way of example only. FIG. 1 shows a radio communication system 100 including user stations  
10 102, 104 and 106, and radio base station (BS) 110. In this example each user station 102, 104 and 106 is a mobile station, more particularly a mobile telephone with display screen. Communication links consisting of radio links 122, 124 and 126 are established between BS 110 and user stations 102, 104 and 106 respectively. The geographical area served by BS 110 constitutes one  
15 cell of a cellular radio communication system.

In the present example the operator of communication system 100 has the role of bandwidth provider and is responsible for a given bandwidth of said communication system, which in this example consists of the whole bandwidth  
20 provided by BS 110 via its radio links. The respective users of user stations 102, 104 and 106 constitute respective partial users of the given bandwidth from BS 110 for which the system operator is responsible. In the present invention the operator of communication system 100 provides different amounts of said given bandwidth to respective partial users of said given bandwidth, that is different  
25 amounts of bandwidth will be employed in the different respective communications from user stations 102, 104 and 106.

In the present example, BS 110 is connected to a mobile services switching centre (MSC) 120, which in turn is connected to a public switched telephone  
30 network (PSTN) 130. PSTN can be connected to any other information or communication network, for example the internet. Users or service providers

can be connected to the communication system through PSTN 130 or alternatively through an interface coupled directly to MSC 120 or BS 110.

Furthermore it is to be appreciated that the present invention is applicable to  
5 other varieties of communication system or network configurations and network components, arranged in different hierarchical, access and interconnection formats, in data handling communications systems such as UMTS. Similarly, it is to be appreciated that according to the specific network configuration and hierarchies, alternative system components will be incorporated serving different  
10 roles compared to BS 110, MSC 120 and PSTN 130. For example, networks such as UMTS ones may incorporate a public data network as opposed to a PSTN, and may incorporate a mobile packet switch as opposed to an MSC. Indeed the invention is applicable to any communication network, including overall networks consisting of sub-networks arranged in parallel and/or  
15 superimposed hierarchical logical format, in which a bandwidth provider is providing bandwidth down a supply chain to partial users thereof who will require different respective amounts of bandwidth.

The method of the present embodiment includes the step of determining a  
20 bandwidth availability profile with respect to said given bandwidth. The available bandwidth at a particular time is the difference between the total given bandwidth that can be borne, in this case by BS 110, and the bandwidth already in use at that time. An alternative terminology for available bandwidth is instantaneous bandwidth. In a simplistic version of the present example,  
25 consider that only user stations 102 at that particular time is engaged in traffic communication, thus the bandwidth in use at that particular time is that used in by user station 102. Hence the available bandwidth at that particular time is determined accordingly as the difference between the above two described amounts. This value embodies the simplest form of bandwidth availability profile  
30 with respect to the given bandwidth. However, a more preferred form of the bandwidth availability profile is one which also includes data related to the



amount of bandwidth that has already been committed to certain partial users. In this example consider that user station 104 has requested a communication channel and that the system operator has committed certain bandwidth to establishing that channel. Then in this case the bandwidth availability profile is  
5 determined in the form of a time dependent function including both the exiting usage of user station 102 and the impending usage of user station 104. It will be appreciated that in applying the present invention the skilled person will select the form of the bandwidth availability profile according to the commercial and technical requirements of the particular system under consideration.

10

In the present embodiment the means, for determining a bandwidth availability profile with respect to said given bandwidth as described above, is shown as item 140 in FIG. 1, and consists of a discrete processing unit containing electronic circuitry, being located in MSC 120. However, it is to be appreciated  
15 that in other embodiments of the present invention such means can be incorporated in the form of software, alternative hardware, manual input means, or a combination of any of the above. Also, the unit embodying such means can be located in other parts of the communication system such as at BS 110, or can even be formed of different component parts distributed in a plurality of  
20 locations within the system.

The method of the present embodiment includes the step of determining a traffic profile with respect to traffic waiting to use said given bandwidth. In the present example the traffic waiting to use the given bandwidth is the traffic user station  
25 106 wishes to communicate. For clarity, the distinction is drawn between the traffic waiting to use the given bandwidth which is exemplified by that of user station 106, which is characterised in that the system operator has not committed to allocate bandwidth to this traffic, and the traffic of user station 104 which as described above, although not yet sent, is nevertheless included in the  
30 determination of the bandwidth availability profile as it is characterised by being traffic that the system has committed to be borne.

In the present embodiment the traffic profile is a function of a level of said traffic waiting to use said given bandwidth. In the present simple case the traffic profile is thus represented by data corresponding to the traffic level to be  
5 communicated by user station 106. It is to be appreciated that in other more complicated embodiments the data will correspond to many user stations, and will be processed using appropriate processing techniques.

In the present embodiment the means, for determining a traffic profile with  
10 respect to said given bandwidth as described above, are shown as item 150 in FIG. 1, and consist of a discrete processing unit containing electronic circuitry, being located in BS 110. However, it is to be appreciated that in other embodiments of the present invention such means can be incorporated in the form of software, alternative hardware, manual input means, or a combination  
15 of any of the above. Also, the unit embodying such means can be located in other parts of the communication system such as at MSC 120, or can even be formed of different component parts distributed in a plurality of locations within the system.

20 In an alternative embodiment, the traffic profile is a function of a priority of said traffic waiting to use said given bandwidth. Priority refers to the delay criticality of traffic waiting to use the system, for example it can be the inverse of allowable latency. Relating to the present example, the traffic profile is determined according to a profile that lends a higher priority weighting to the  
25 traffic of user station 106 if that traffic is to consist of speech, and a lower weighting if the traffic of user station 106 is to consist of text data.

In a further alternative embodiment, the traffic profile is a function of a level of said traffic waiting to use said given bandwidth and is a function of a priority of  
30 said traffic waiting to use said given bandwidth. Thus the options described above are combined in one. the specific programmes or algorithms providing

such a combined determination will again be chosen by the skilled person according to the requirements of the particular system under consideration.

In those embodiments described above wherein the traffic profile is a function,  
5 either solely or partly, of a priority of the waiting traffic, a further option is that the function of a priority of said traffic waiting to use said given bandwidth is calculated in a non-linear fashion with respect to time for respective components of said traffic waiting to use said given bandwidth. One example is that a long  
10 text message may originally be of low criticality with respect to delay in that it can be sent any time within,, say, a four hour period, but on the other hand once transmission has been started it is of high criticality that the transmission is completed within a further time period of, say, five minutes. Alternatively, irrespective of the finite delays permitted, non-linear priority with respect to time  
15 can be programmed into the function of priority such as to ensure that high priority is allocated to messages when most of their content is sent, so as to avoid wasteful repetition of the whole message in the event that just the last small part thereof was not sent due to being low priority.

The method of each of the above embodiments also includes the step of  
20 transmitting capacity information to a said partial user, wherein said capacity information comprises said bandwidth availability profile and said traffic profile. One possibility is for both the bandwidth availability profile and the traffic profile to be combined before transmission to a partial user. In the present example the capacity information is transmitted to the partial associated with user station  
25 108. The means, for transmitting capacity information to a said partial user, wherein said capacity information comprises said bandwidth availability profile and said traffic profile as described above, are shown as item 160 in FIG. 1, and consist of a discrete processing unit containing electronic circuitry and associated radio transmission equipment, being located in BS 110. However, it  
30 is to be appreciated that in other embodiments of the present invention such means can include software, alternative hardware, manual input means, or a

combination of any of the above. Also, the unit embodying such means can include component parts distributed in a plurality of locations within the system.

5 In general, one opportunity provided to a partial user of a bandwidth resource by the capacity information provided to him under the present invention is that of deciding whether under the particular circumstances represented by the present capacity information he wishes to go ahead with his own communication, or perhaps wait until it can take place at lower cost due to higher available capacity at a later time.

10

Under the present invention, partial users with simple applications will use the above described capacity information at a link layer of overall parallel network arrangements to operate simple packet schedulers. partial users whose traffic will consists of more sophisticated multimedia applications will use the above  
15 described capacity information in conjunction with algorithms to achieve their communications requirements at improved efficiency and reduced cost. To facilitate this, means can be provided to convey the profiles of the application layers both at the point of source of content providers and at end-user stations. The means can consist of Application Programming Interfaces (API) which  
20 would allow applications authors to write appropriate software for increased exploitation of the capacity information. Such algorithms determine how long to queue or delay message elements before it becomes essential to send them, so allowing higher priority messages to use the bandwidth resource and also to achieve maximum utilisation of the available bandwidth.

25

In addition to the above described profiles, the bandwidth provider can also transmit cost profiles to the partial users. These will provide information on how transmission cost varies. Also, yet further advantages arise from the present invention when used in conjunction with a method and apparatus for providing a  
30 service in a communication system as described in the co-pending patent


application by the present inventors entitled "Providing a Service in a Communication System" GB9818585.3.

CLAIMS

1. A method of operating within a communication system (100) wherein a  
5 bandwidth provider responsible for a given bandwidth of said communication  
system (100) provides different amounts of said given bandwidth to respective  
partial users of said given bandwidth;  
the method being characterized by comprising the steps of:  
determining a bandwidth availability profile with respect to said given bandwidth;  
10 determining a traffic profile with respect to traffic waiting to use said given  
bandwidth; and  
transmitting capacity information to a said partial user, wherein said capacity  
information comprises said bandwidth availability profile and said traffic profile.
- 15 2. A method according to claim 1, wherein said traffic profile is a function of a  
level of said traffic waiting to use said given bandwidth.
3. A method according to claim 1, wherein said traffic profile is a function of a  
priority of said traffic waiting to use said given bandwidth.
- 20 4. A method according to claim 1, wherein said traffic profile is a function of a  
level of said traffic waiting to use said given bandwidth and is a function of a  
priority of said traffic waiting to use said given bandwidth.
- 25 5. A method according to any of claims 3 and 4, wherein said function of a  
priority of said traffic waiting to use said given bandwidth is calculated in a non-  
linear fashion with respect to time for respective components of said traffic  
waiting to use said given bandwidth.
- 30 6. A method according to any claim 1 wherein said communication system is  
a radio communication system.

7. An apparatus for a communication system (100) wherein a bandwidth provider responsible for a given bandwidth of said communication system (100) provides different amounts of said given bandwidth to respective partial users of  
5 said given bandwidth;  
the apparatus being characterized by comprising:  
means for determining a bandwidth availability profile with respect to said given bandwidth;  
means for determining a traffic profile with respect to traffic waiting to use said  
10 given bandwidth; and  
means for transmitting capacity information to a said partial user, wherein said capacity information comprises said bandwidth availability profile and said traffic profile.
- 15 8. An apparatus according to claim 7, wherein said traffic profile is a function of a level of said traffic waiting to use said given bandwidth.
9. An apparatus according to claim 6, wherein said traffic profile is a function of a priority of said traffic waiting to use said given bandwidth.  
20
10. An apparatus according to claim 7, wherein said traffic profile is a function of a level of said traffic waiting to use said given bandwidth and is a function of a priority of said traffic waiting to use said given bandwidth.
- 25 11. An apparatus according to any of claim 9 wherein said function of a priority of said traffic waiting to use said given bandwidth is calculated in a non-linear fashion with respect to time for respective components of said traffic waiting to use said given bandwidth
- 30 12. An apparatus according to claim 7 wherein said communication system (100) is a radio communication system.

1/1

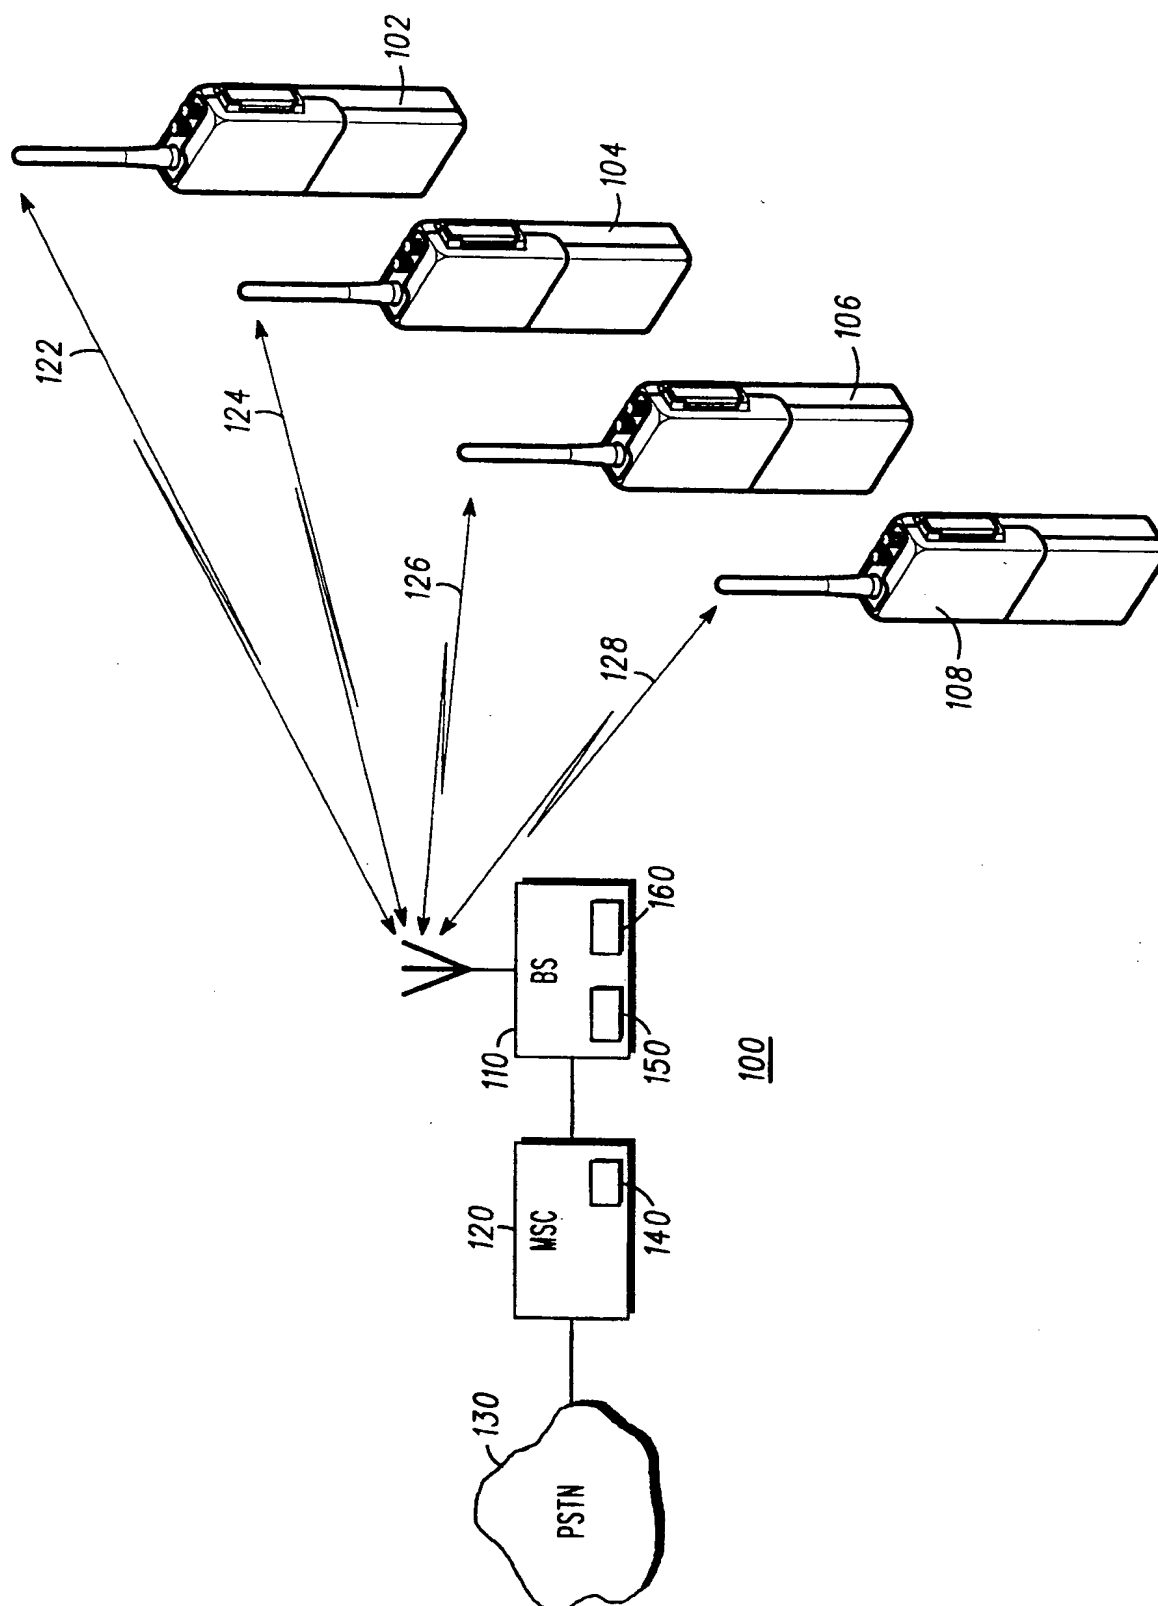



# INTERNATIONAL SEARCH REPORT

Intern: al Application No

PCT/EP 99/05824

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 33393 A (MOTOROLA LTD.) 12 September 1997 (1997-09-12) page 2, line 28 -page 3, line 20 ---	1,7
A	WO 95 30317 A (BRITISH TELECOMMUNICATIONS PLC.) 9 November 1995 (1995-11-09) page 2, line 28 -page 3, line 6; claims 4,8 ---	1
A	US 4 330 857 A (ALVAREZ, III ET AL) 18 May 1982 (1982-05-18) abstract --- -/--	5,11



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

**Special categories of cited documents:**

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

9 December 1999

Date of mailing of the international search report

20/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Danielidis, S

# INTERNATIONAL SEARCH REPORT

Internal Application No  
PCT/EP 99/05824

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	IERA ET AL.: " "Call-Level" and "Burst-Level" Priorities for an Effective Management of Multimedia Services in UMTS" PROCEEDINGS OF INFOCOM, IEEE COMP.SOC.PRESS, vol. conf.15, 24 March 1996 (1996-03-24), pages 1363-1370, XP000622274 Los Alamitos, U.S.A the whole document ---	1,7
A	US 5 638 412 A (BLAKENEY, II ET AL.) 10 June 1997 (1997-06-10) column 8, line 12 - line 30 ---	1
A	EP 0 448 073 A (FUJITSU LTD.) 25 September 1991 (1991-09-25) abstract ---	1,7
A	US 5 583 869 A (GRUBE ET AL.) 10 December 1996 (1996-12-10) column 5, line 58 - column 6, line 30; figure 3 ---	1,7
A	WO 97 35410 A (GENERAL INSTRUMENT CORPORATION OF DELAWARE) 25 September 1997 (1997-09-25) abstract; figures 1,3,4 -----	1,7

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/05824

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9733393 A	12-09-1997	GB 2310972 A	10-09-1997
		CN 1181852 A	13-05-1998
		EP 0824805 A	25-02-1998
		JP 11504788 T	27-04-1999
WO 9530317 A	09-11-1995	AU 2316495 A	29-11-1995
		CA 2188881 A	09-11-1995
		EP 0758517 A	19-02-1997
		JP 9512678 T	16-12-1997
US 4330857 A	18-05-1982	CA 1143878 A	29-03-1983
		EP 0035231 A	09-09-1981
		JP 1447995 C	30-06-1988
		JP 56132831 A	17-10-1981
		JP 62058577 B	07-12-1987
US 5638412 A	10-06-1997	AU 685648 B	22-01-1998
		AU 2863695 A	05-01-1996
		BR 9505489 A	20-08-1996
		CN 1129507 A	21-08-1996
		EP 0719491 A	03-07-1996
		FI 960195 A	15-01-1996
		JP 9502075 T	25-02-1997
		WO 9535002 A	21-12-1995
		US 5818871 A	06-10-1998
EP 448073 A	25-09-1991	JP 3270342 A	02-12-1991
		JP 2814672 B	27-10-1998
		JP 3272248 A	03-12-1991
		CA 2038646 C	07-02-1995
		DE 69126462 D	17-07-1997
		DE 69126462 T	06-11-1997
		US 5258979 A	02-11-1993
US 5583869 A	10-12-1996	AU 3199995 A	26-04-1996
		CN 1136375 A	20-11-1996
		GB 2298999 A,B	18-09-1996
		GB 2324686 A,B	28-10-1998
		WO 9610875 A	11-04-1996
WO 9735410 A	25-09-1997	AU 708348 B	05-08-1999
		AU 2329197 A	10-10-1997
		CA 2249260 A	25-09-1997
		CN 1218592 A	02-06-1999
		EP 0888679 A	07-01-1999
		NZ 331915 A	28-05-1999

